



US007719425B2

(12) **United States Patent**
Colby

(10) **Patent No.:** **US 7,719,425 B2**
(45) **Date of Patent:** **May 18, 2010**

- (54) **RADIO FREQUENCY SHIELDING**
- (76) Inventor: **Steven M. Colby**, P.O. Box 52033, Palo Alto, CA (US) 94303
- (*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 661 days.

5,700,037	A	12/1997	Keller	
6,158,777	A	12/2000	Twardosz	
6,471,127	B2	10/2002	Pentz	
7,218,233	B2 *	5/2007	Bon	340/572.8
2002/0117243	A1	8/2002	Koren	
2003/0014891	A1	1/2003	Nelms	
2003/0057286	A1 *	3/2003	Yamagishi et al.	235/492
2004/0089724	A1	5/2004	Lasch	
2004/0169087	A1	9/2004	Lasch	
2004/0237360	A1	12/2004	Nelms	
2004/0256469	A1	12/2004	Faenza, Jr.	
2005/0011776	A1	1/2005	Nagel	
2005/0171898	A1	8/2005	Bishop	
2005/0205665	A1	9/2005	Lasch	
2005/0274794	A1	12/2005	Bason	
2006/0005050	A1	1/2006	Bason	

(21) Appl. No.: **11/350,309**

(22) Filed: **Feb. 7, 2006**

(65) **Prior Publication Data**
US 2006/0187061 A1 Aug. 24, 2006

Related U.S. Application Data
(60) Provisional application No. 60/758,751, filed on Jan. 13, 2006, provisional application No. 60/752,933, filed on Dec. 21, 2005, provisional application No. 60/715,641, filed on Sep. 10, 2005, provisional application No. 60/712,308, filed on Aug. 30, 2005, provisional application No. 60/700,884, filed on Jul. 19, 2005, provisional application No. 60/685,331, filed on May 27, 2005, provisional application No. 60/678,428, filed on May 6, 2005, provisional application No. 60/650,478, filed on Feb. 7, 2005.

- (51) **Int. Cl.**
G08B 13/14 (2006.01)
- (52) **U.S. Cl.** **340/572.8**; 340/572.1; 340/10.1; 340/10.3; 235/375; 235/380; 235/492
- (58) **Field of Classification Search** 340/572.1, 340/572.2, 572.3, 572.4, 572.7, 572.8, 539.1, 340/825.69, 10.1, 10.2, 10.3; 235/380, 383, 235/487, 492, 375; 343/702, 841
See application file for complete search history.

- (56) **References Cited**
U.S. PATENT DOCUMENTS
4,744,497 A 5/1988 O'Neal et al.
5,327,115 A * 7/1994 Swierczek 340/309.7
5,538,291 A 7/1996 Gustafson

(Continued)

OTHER PUBLICATIONS

Unknown www.walletgard.com/contact.html Revised Feb. 19, 2006.


(Continued)

Primary Examiner—Hung T. Nguyen

(57) **ABSTRACT**

Shielding is associated with RFID tags to achieve new systems and methods having various advantages. These systems include containers configured to store RFID enabled identity documents, the use of RFID tags to monitor the state of a container, and the inclusion of shielding in identity devices. Disclosed are shielded passports, driver's licenses, and the like. Some embodiments further including reading systems for reading identity devices comprising shielding and RFID tags.

8 Claims, 15 Drawing Sheets

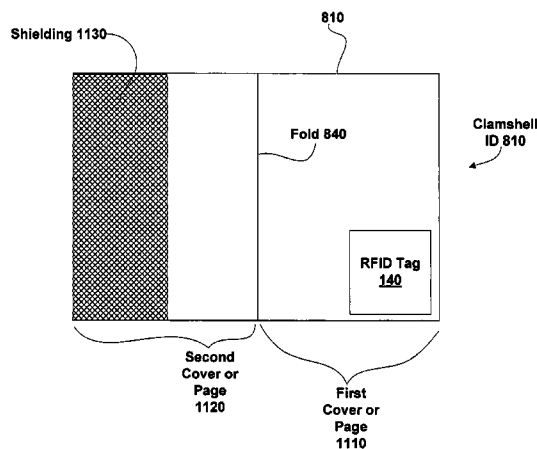

U.S. PATENT DOCUMENTS

2006/0254815 A1* 11/2006 Humphrey et al. 174/380
2007/0152829 A1* 7/2007 Lindsay et al. 340/572.3

OTHER PUBLICATIONS

Unknown Foiling the Oyster Card, Spy Blog Feb. 16, 2004.
Schneier, Bruce RFID Passport Security Revisited. Aug. 9, 2005.
Schneier, Bruce The Security of RFID Passports. Nov. 3, 2005.
Yu, Roger Electronic passports set to thwart forgers, USA Today
Aug. 8, 2005.
Unknown EMF Shielding & Conductive Fabrics www.lessemf.com/fabric.html printed Aug. 4, 2005.
Unknown Characteristics of Metal Shielding Textiles www.rfsafe.com Printed Aug. 2005.
Yoshida, Junko Tests reveal e-passport security flaw www.eetimes.com Aug. 30, 2004.

Unknown Information Security Radio Frequency Identification
Technolgy in the Federal Government. GAO-05-551 May 27, 2005.
Goo, Sara Security Concerns Prompt Passport Redesign www.washingtonpost.com Apr. 30, 2005.

Moss, Frank Statement of Frank E. Moss, Committee on Interna-
tional Relations, www.house.gov Jun. 23, 2004.

Unknown CDT Working Group on RFID: Privacy Best Practics for
Deployment of RFID Technology www.cdt.org May 1, 2006.

Moss, Frank How the U.S. Passport Program Enhances Border Secu-
rity travel.state.gov Jun. 22, 2005.

Paterson, Erik U.S. Issues First e-passports to diplomats, citizen
issuance to start later in '06 Apr. 20, 2006.

Juels, Ari; Security and Privacy Issues in E-passports,
SECURECOMM'05—vol. 00 2005) Sep. 5-9, 2005.

* cited by examiner

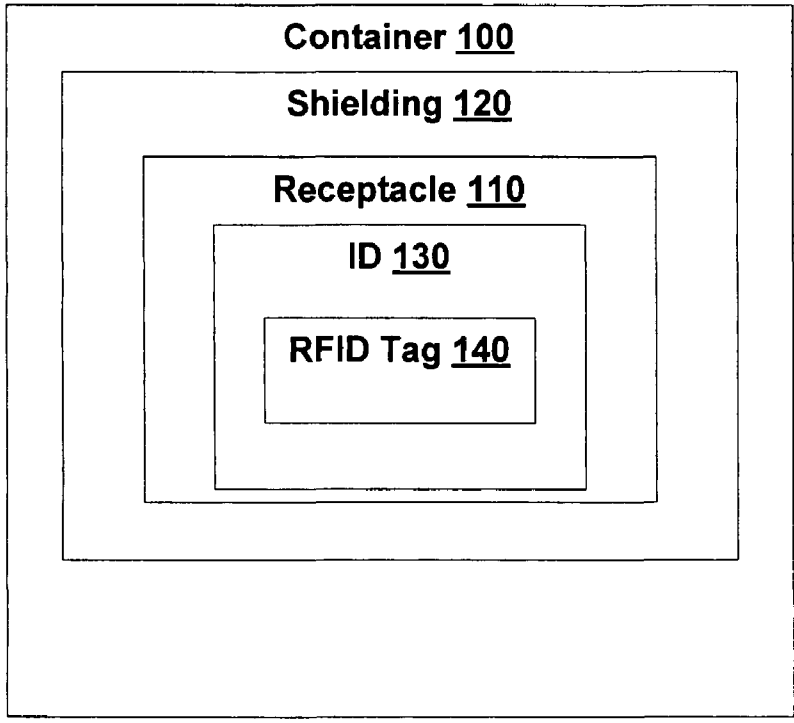


FIG. 1

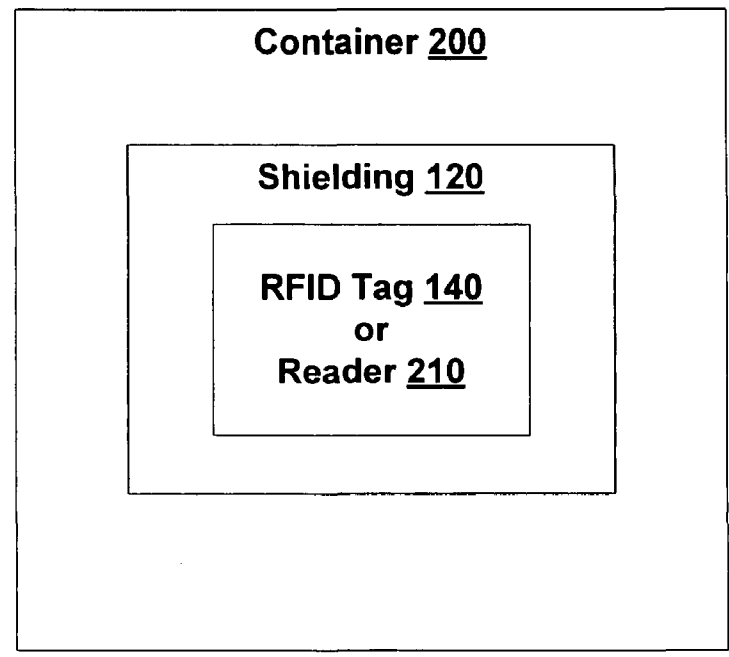


FIG. 2

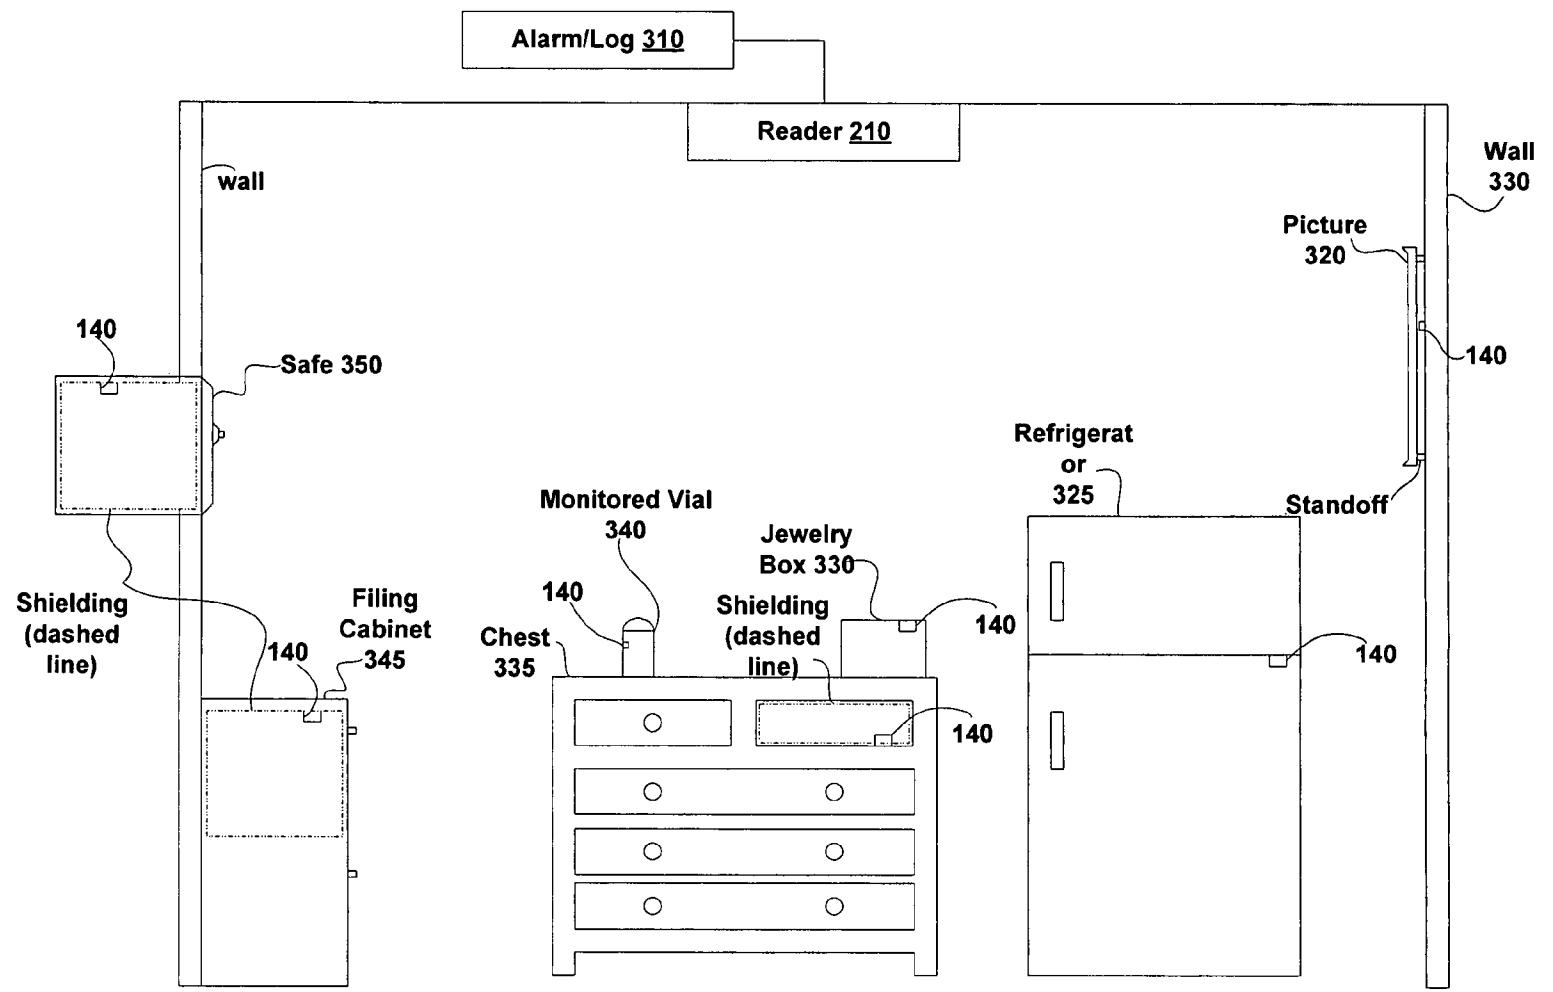


FIG. 3

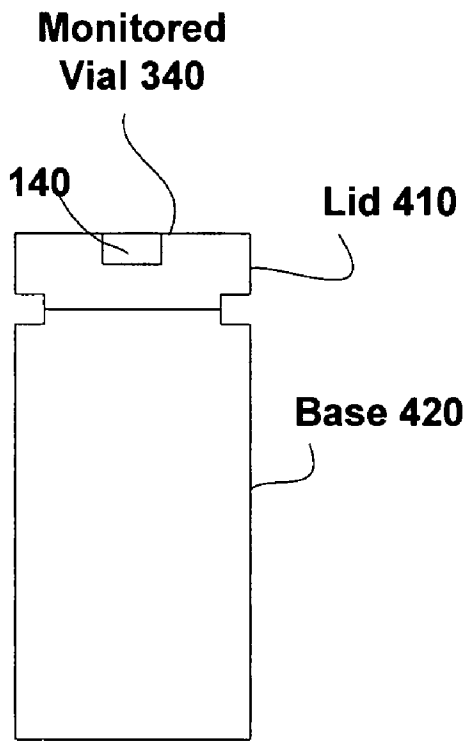


FIG. 4

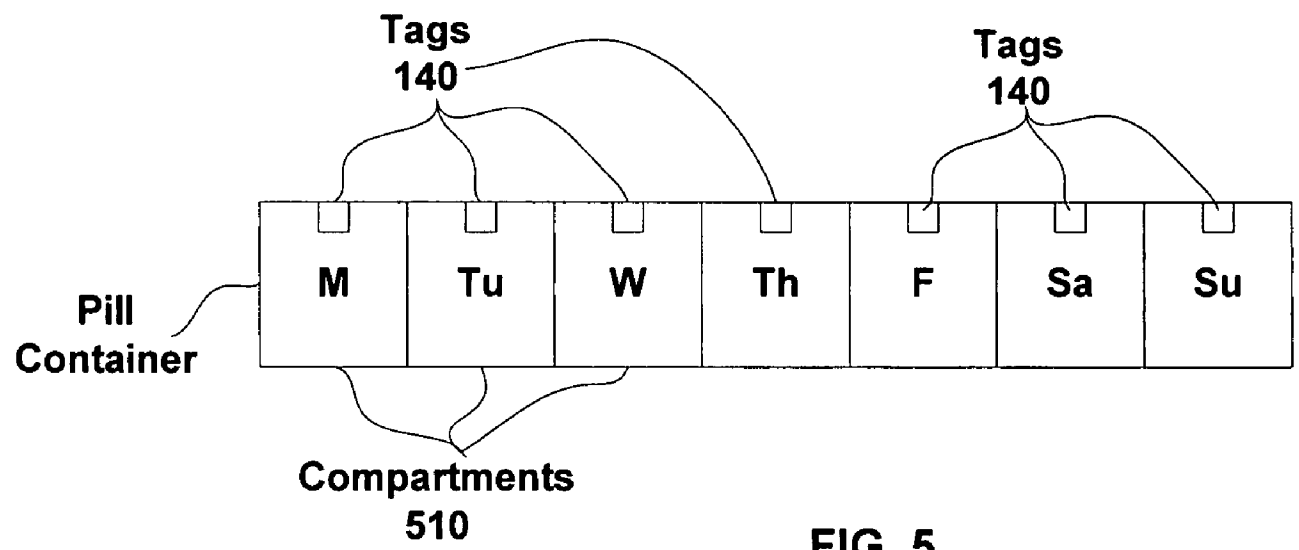


FIG. 5

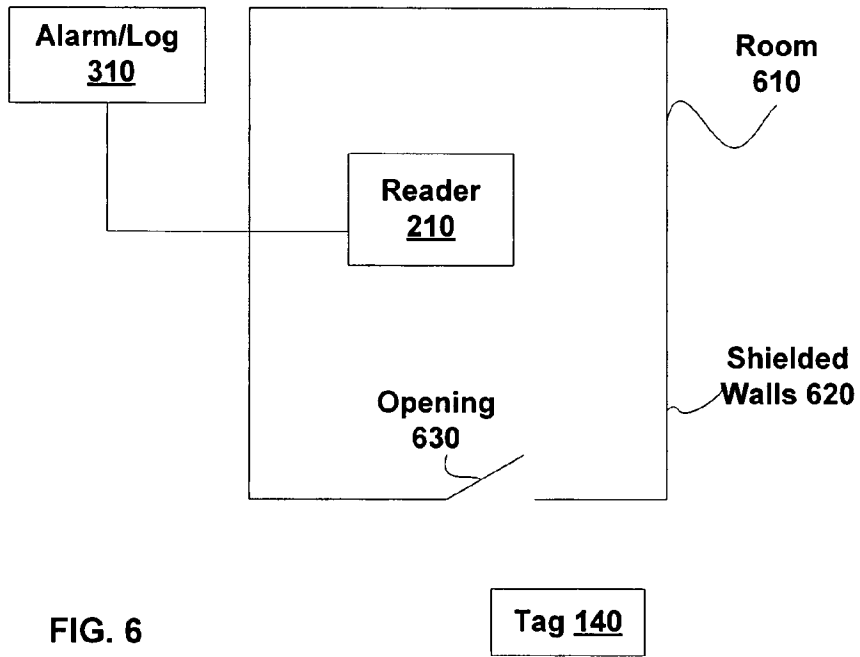


FIG. 6

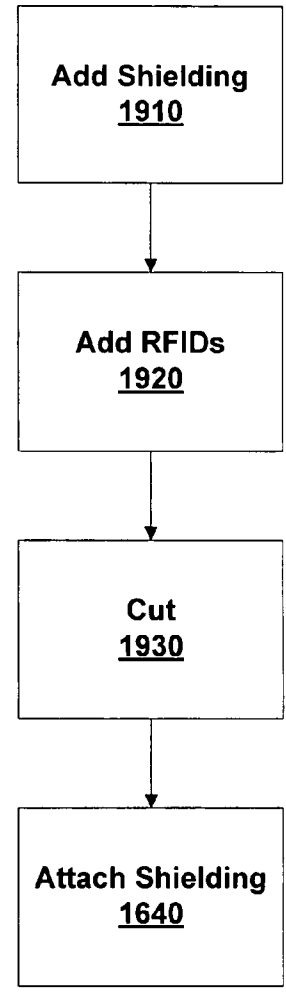


FIG. 19

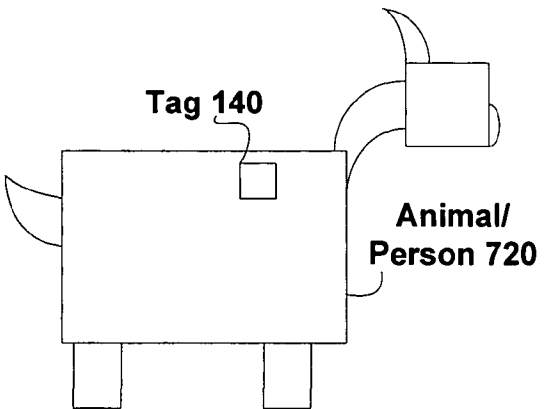
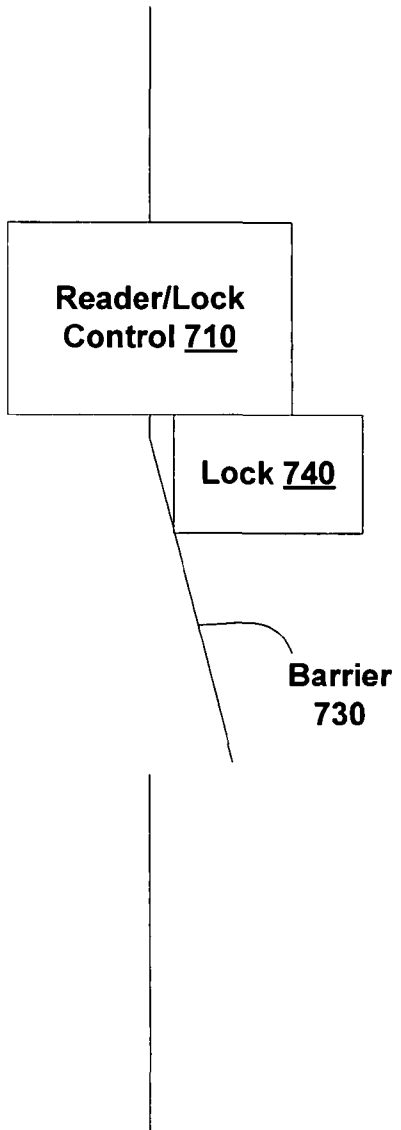


FIG. 7



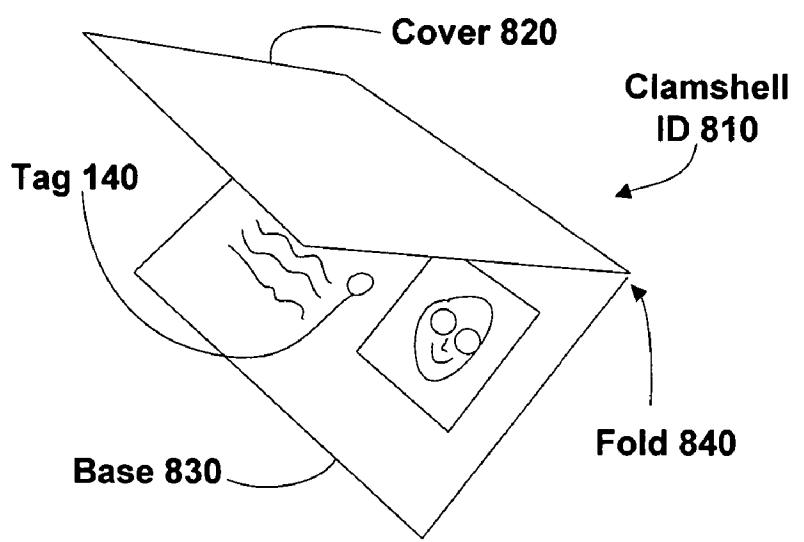


FIG. 8

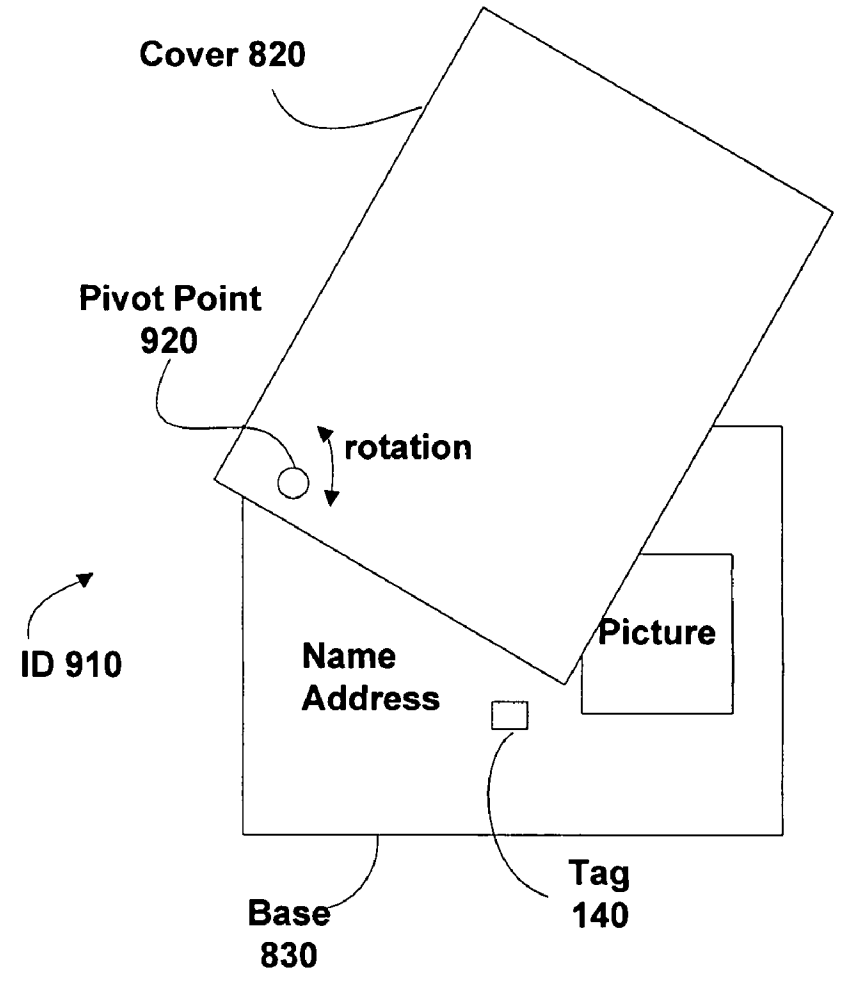


FIG. 9

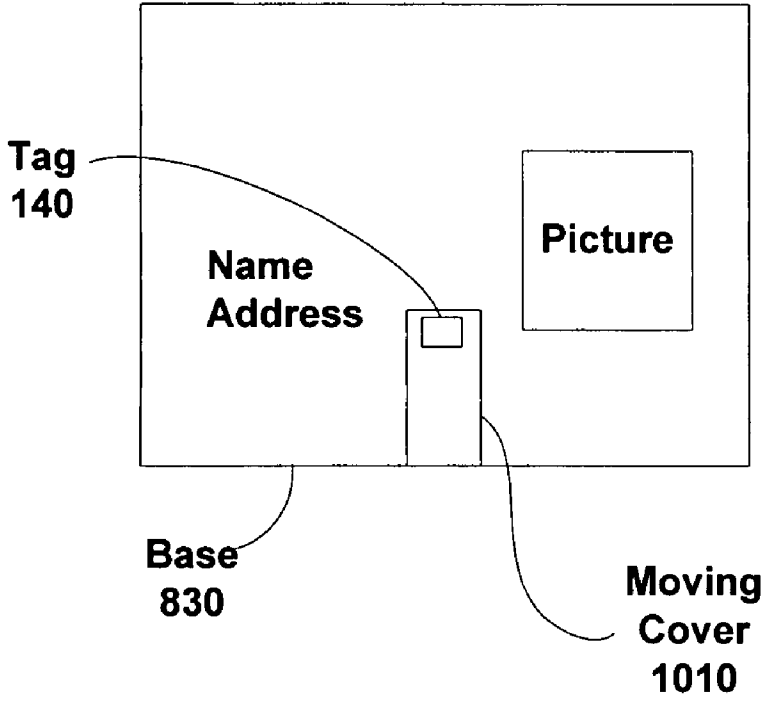


FIG. 10A

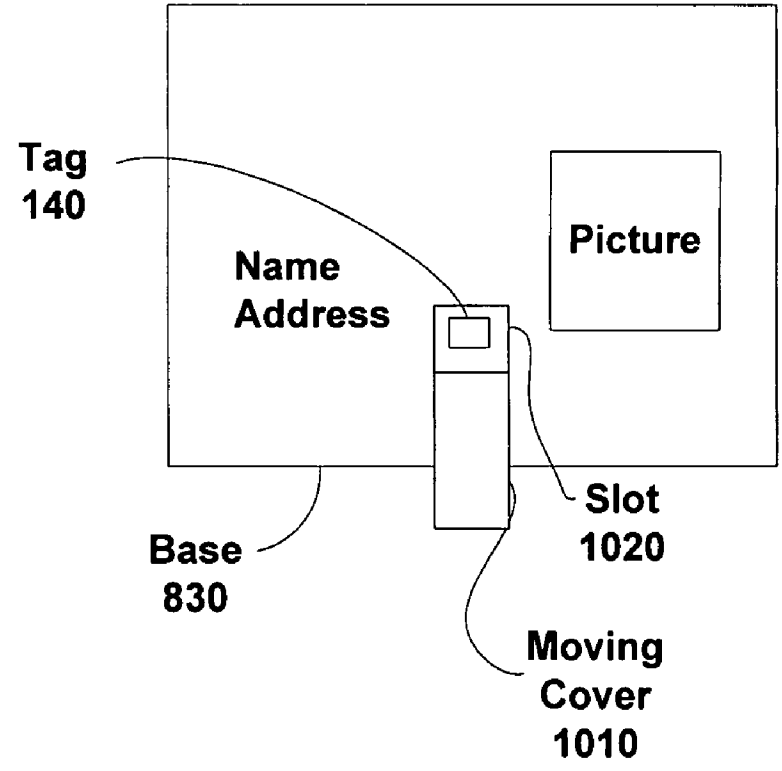


FIG. 10B

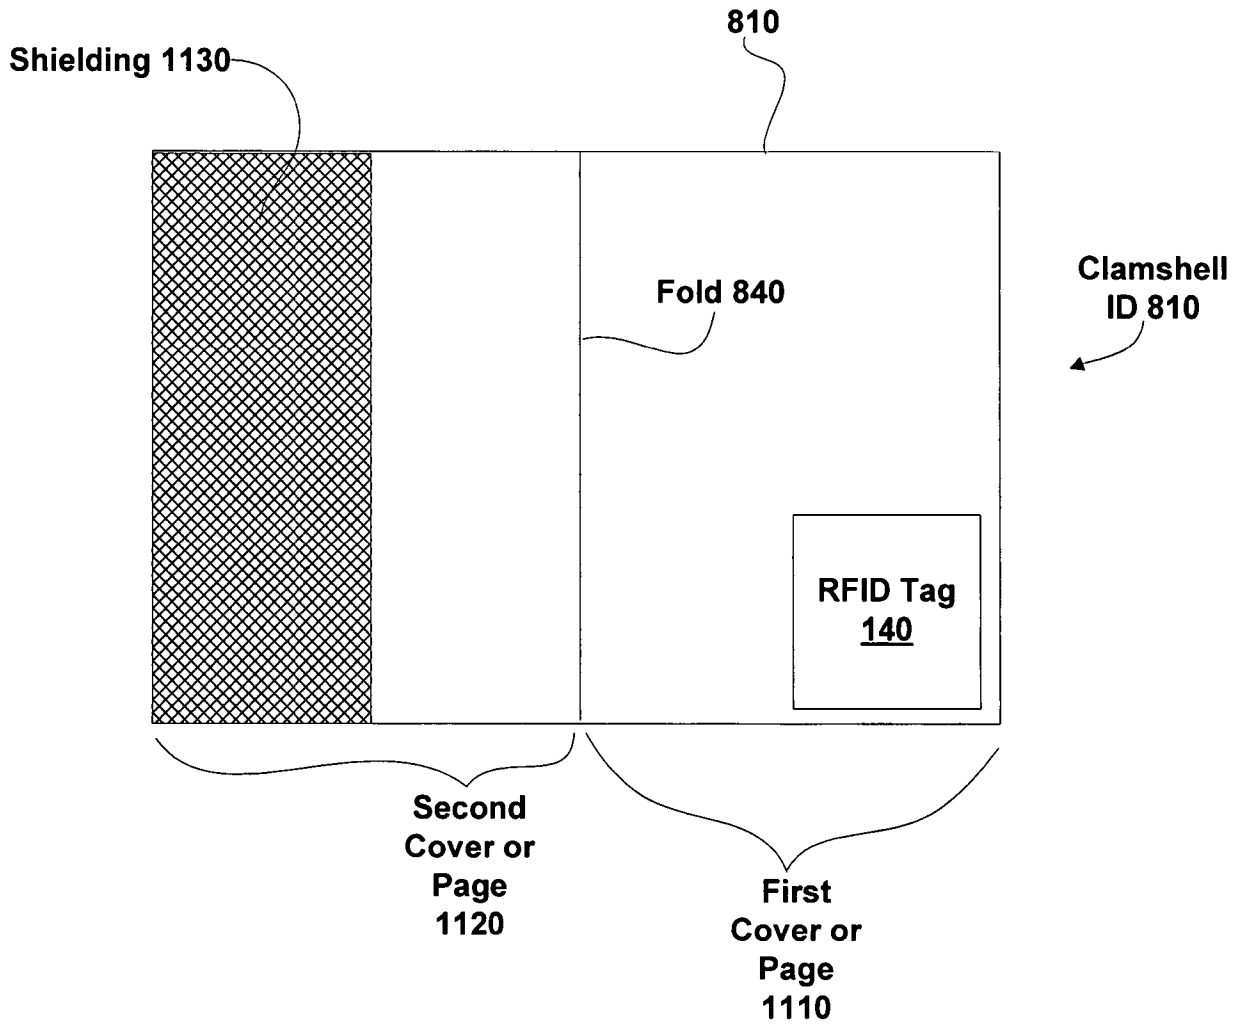


FIG. 11

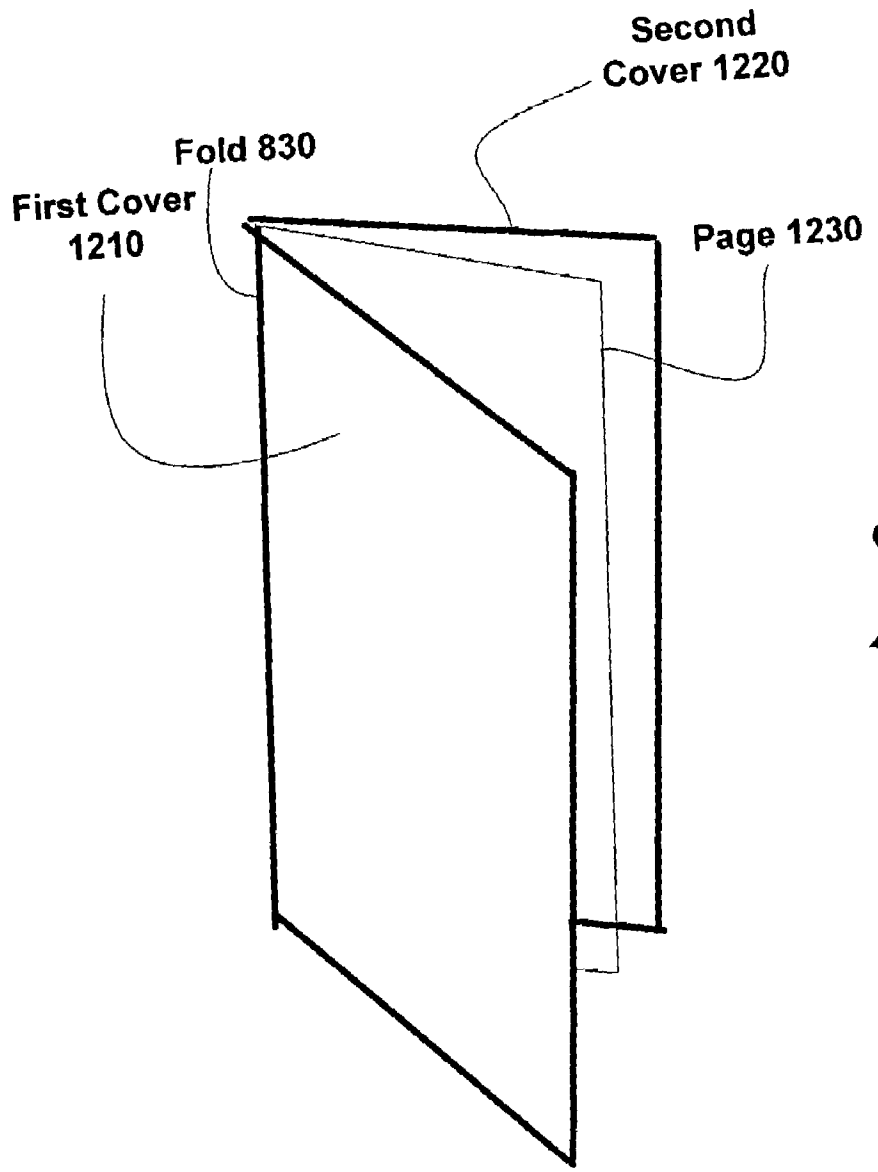


FIG. 12


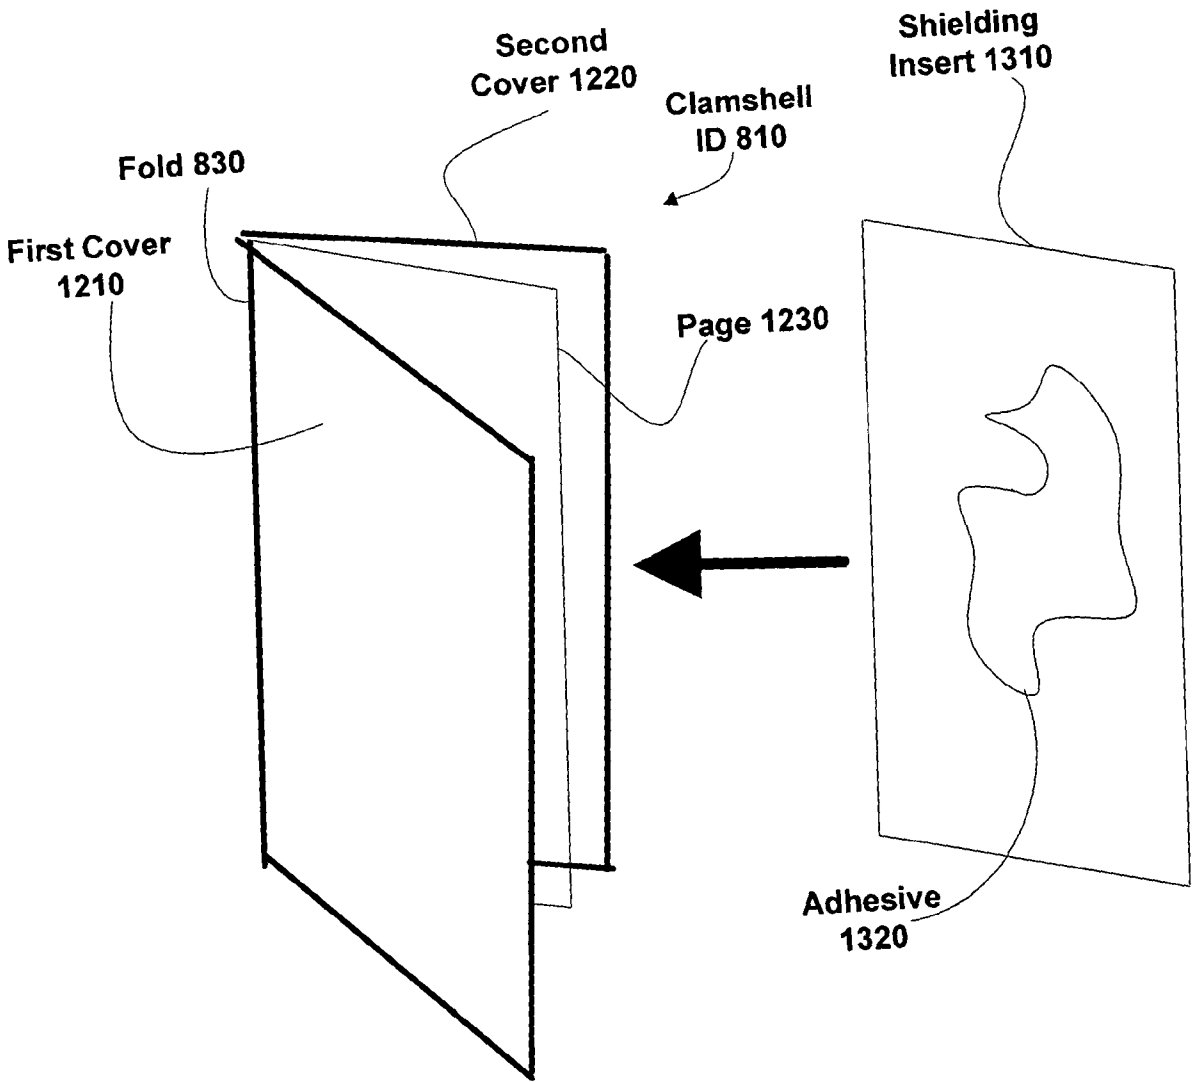


FIG. 13

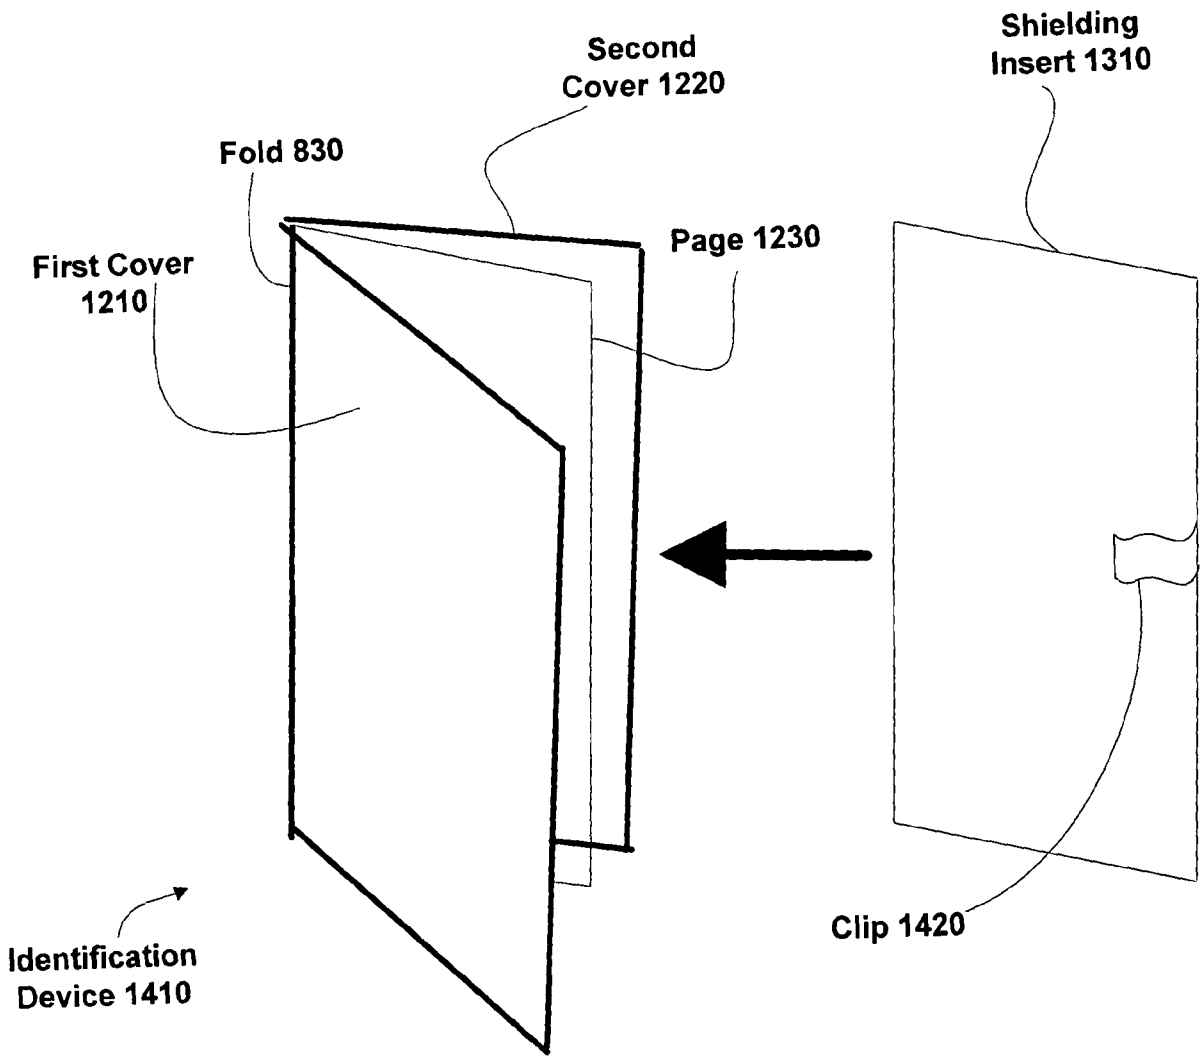

Identification Device 1410

First Cover 1210

Fold 830

Second Cover 1220

Page 1230

Shielding Insert 1310

Clip 1420

FIG. 14

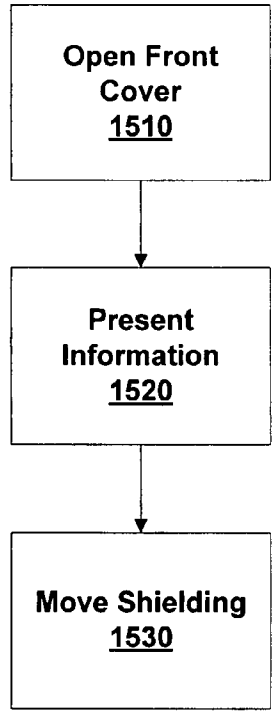


FIG. 15

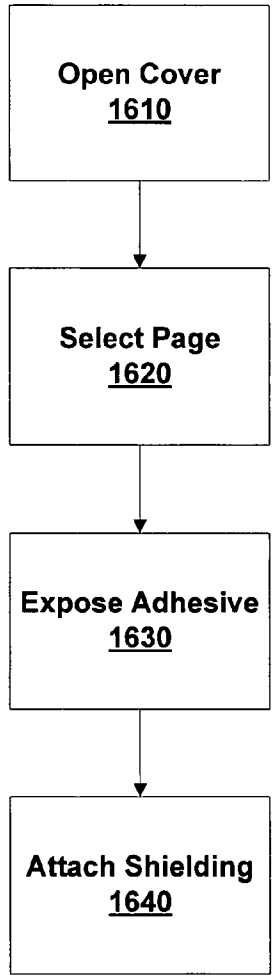


FIG. 16

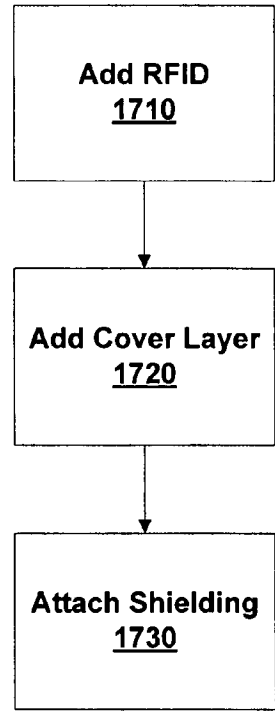
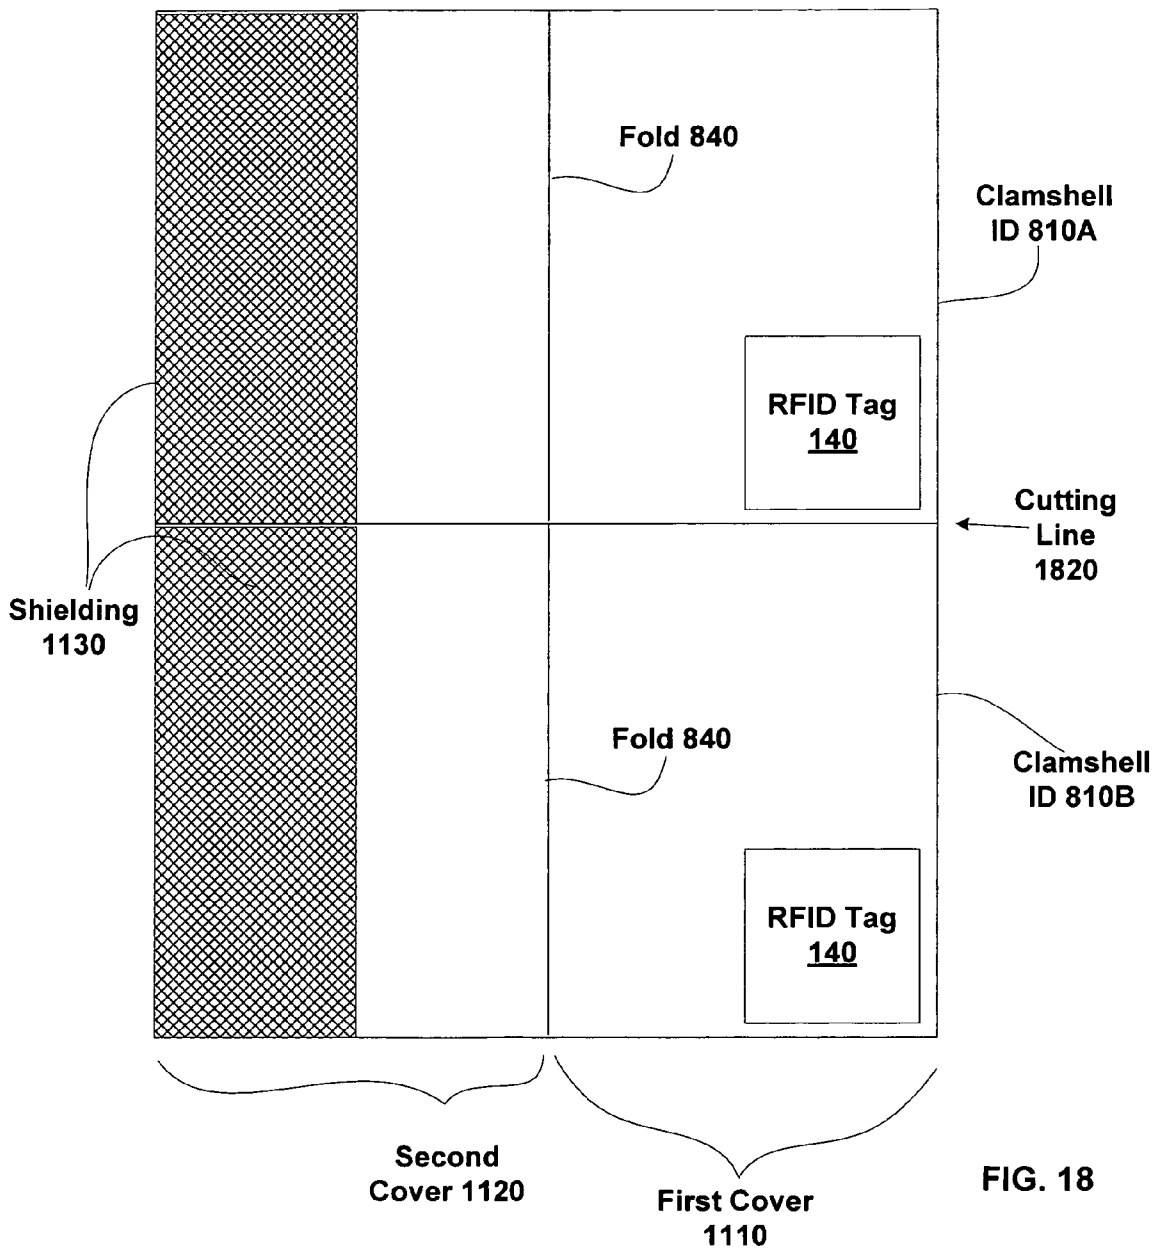


FIG. 17



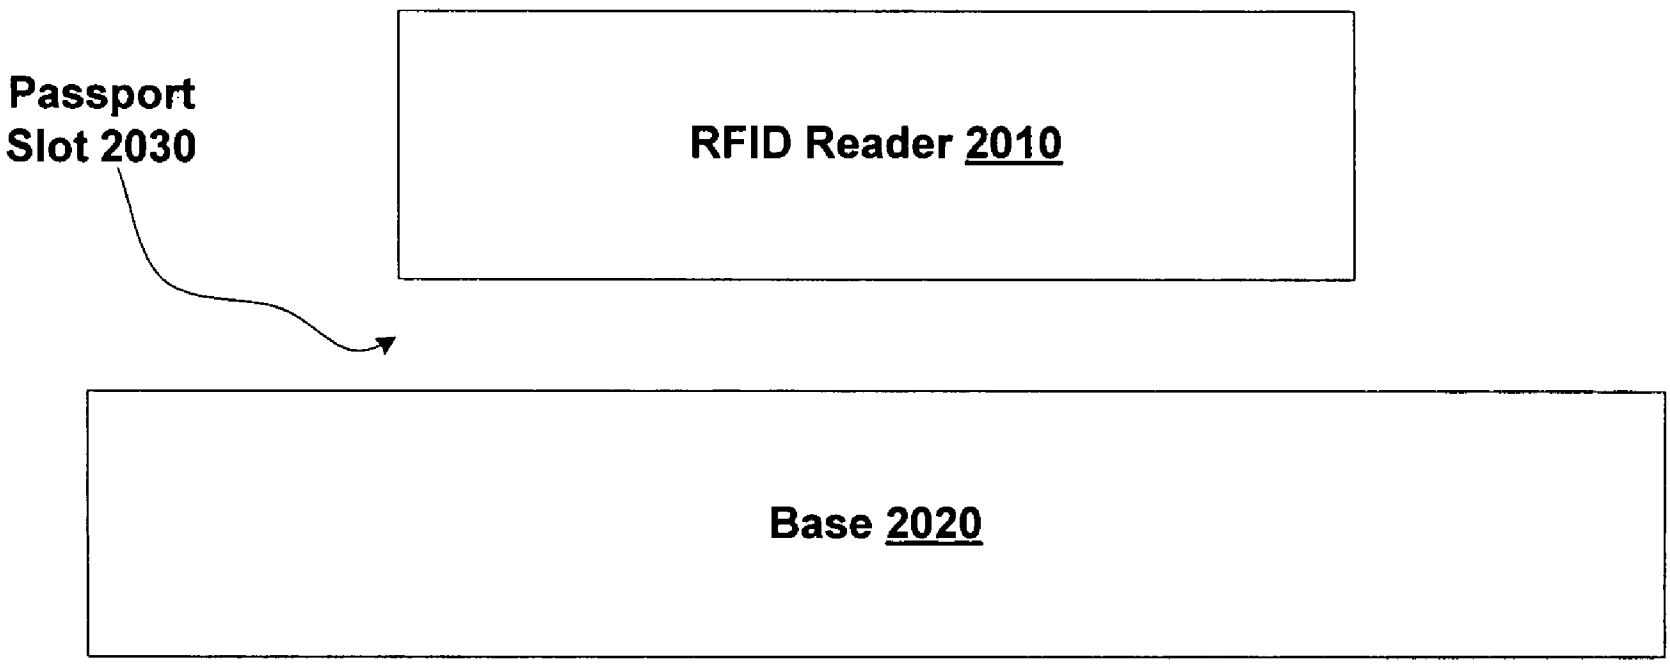


FIG. 20

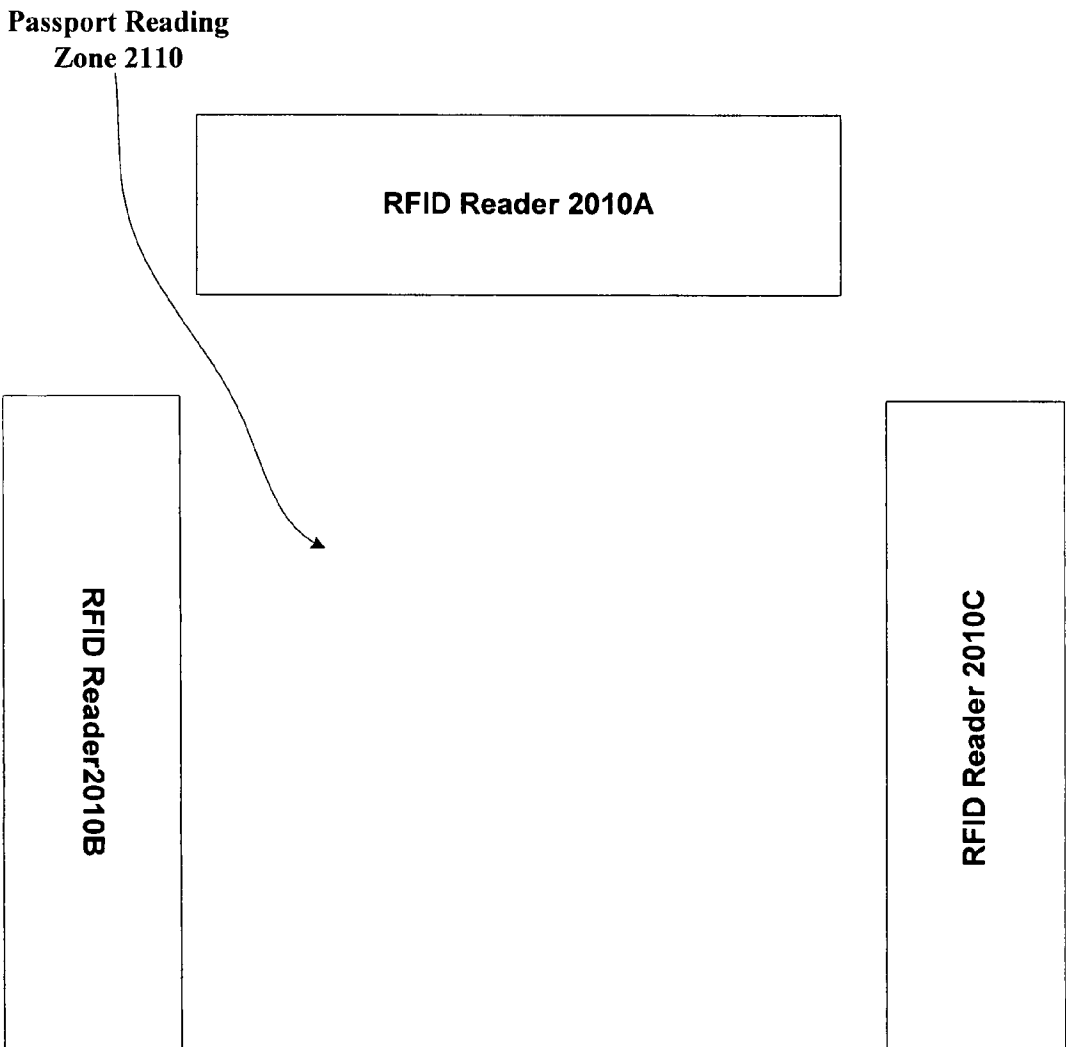


FIG. 21

RADIO FREQUENCY SHIELDING**CROSS-REFERENCE TO RELATED APPLICATIONS**

This application claims priority and benefit from commonly owned U.S. Provisional Patent Applications: No. 60/650,478 entitled "RFID Shielding," filed Feb. 7, 2005; No. 60/678,428 entitled "RFID device," filed May 6, 2005; No. 60/685,331 entitled "RF Powered Remote," filed May 27, 2005; No. 60/700,884 entitled "Electronically Switchable RFID," filed Jul. 19, 2005; No. 60/712,308 entitled "Passive radio frequency data logger," filed Aug. 30, 2005; No. 60/715,641 entitled "RFID applications," filed Sep. 10, 2005; No. 60/752,933 entitled "Multi-key FOB," filed Dec. 21, 2005; and No. 60/758,751 entitled "Multi-switch Credit Card," filed Jan. 13, 2006. The disclosures of these provisional patent applications are hereby incorporated herein by reference in their entirety.

This application is related to co-pending U.S. patent application Ser. No. 11/349,766 entitled "Containers Including Radio Frequency Shielding," and filed Feb. 7, 2006, and to co-pending U.S. patent application Ser. No. 11/350,185 entitled "Identity Devices Including Radio Frequency Shielding," and filed Feb. 7, 2006.

BACKGROUND OF THE INVENTION**1. Field of the Invention**

The invention is in the fields of radio frequency identification (RFID) tags, and more specifically in the field of RFID tag shielding.

2. Description of Related Art

Radio Frequency identity (RFID) tags are, for example, typically small, flexible, and low profile devices that can be affixed to items for electronic tracking and information storage purposes. An RFID tag can be read by an RFID reader when the RFID tag is brought within a certain vicinity of the reader that is broadcasting a radio frequency signal. In some cases, once within that vicinity, the RFID tag receives sufficient power from the radio frequency signal to permit it to transmit a return radio frequency signal using the received power. These RFID tags are referred to as passive RFID tags. In other cases the RFID tag has an independent power source for generating a return radio frequency signal. These RFID tags are referred to as active RFID tags. With either passive or active RFID tags, the return radio frequency signal may include an encoded copy of information stored within the RFID tag. As RFID tags achieve more wide-spread use they will become ubiquitous on forms of identification, and be included in personal and business effects, such as passports, driver's licenses, keys, cell phones, PDAs, and so forth. For example, an RFID tag may be incorporated in a driver's license to store personal information about the licensee. As used herein, RFID tags include radio frequency contactless chips.

A problem with using RFID tags to store security, confidential and/or personal information is that an RFID reader can read any RFID tags that pass within its range. Even if data is encrypted, this creates a possibility of unauthorized access to the personal data and other information stored in the RFID tag, or at the least, detection of the presence of the RFID tag.

SUMMARY

The invention includes the use of shielding in relation to RFID tags. For example, some embodiments of the invention

include shielded containers for storing devices including RFID tags. These devices can include identification devices such as passports, credit cards, or driver's licenses.

Some embodiments of the invention include shielded containers and RFID tags, the RFID tags configured for use in determining a state of the container. For example, detection of an RFID tag can be used to determine if the container is open or closed. These embodiments are optionally used in event logging or security.

Some embodiments of the invention include shielding attached to identification devices. This shielding may, for example, be included in a clamshell configuration, as a shielding insert, or as part of a page or cover.

Various embodiments of the invention include a container comprising an RFID tag configured for determining if the container is open or closed, and radio frequency shielding configured to shield a signal from the RFID tag responsive to whether the container is open or closed.

Various embodiments of the invention include a vehicle comprising a receptacle attached to the vehicle and configured to receive an identification device including an RFID tag, and a radio frequency shielding attached to the receptacle and configured to shield the RFID tag when the identification device is placed within the receptacle.

Various embodiments of the invention include a purse comprising a receptacle configured to receive an identification device including an RFID tag, and a radio frequency shielding attached to the purse and configured to shield the RFID tag when the identification device is placed in the receptacle.

Various embodiments of the invention include a wallet comprising a receptacle configured to receive an identification device including an RFID tag, and a radio frequency shielding attached to the wallet and configured to shield the RFID tag when the identification device is placed in the receptacle.

Various embodiments of the invention include a shielded RFID device comprising an identity device including an RFID tag, and a cover physically attached to the device, the cover including a radio frequency shielding material configured to shield the RFID tag in a first position and to not shield the RFID tag in a second position.

Various embodiments of the invention include an identification device comprising a base including a surface configured to display identifying information, an RFID tag configured to transmit identifying information, and a cover including a radio frequency shielding material configured to shield the RFID tag when closed and to allow the RFID tag to communicate with a reader when open.

Various embodiments of the invention include a passport device comprising an RFID tag configured to transmit identifying information, a surface configured to visually display the identifying information, and an attached cover including a radio frequency shielding material configured to shield the RFID tag when the cover is closed, and configured to enable reading of the RFID tag when the cover is open.

Various embodiments of the invention include a passport device comprising a first cover part including identifying information on an inside surface, a second cover part separated from the first cover part by a fold, an RFID tag within the first cover or the second cover part, and a page between the first cover part and the second cover part, the page including shielding configured for shielding the RFID tag in a first position and not shielding the RFID tag in a second position.

Various embodiments of the invention include a driver's license device comprising an RFID tag configured to transmit identifying information, a surface configured to visually dis-

play the identifying information, and a cover including a radio frequency shielding material configured to shield the RFID tag in a first position, and configured to enable reading of the RFID tag in a second position.

Various embodiments of the invention include a credit card device comprising an RFID tag configured to transmit account information, an attached cover including radio frequency shielding and configured to move relative to the RFID tag, to shield the RFID tag in a first position, and not to shield the RFID that in a second position.

Various embodiments of the invention include a shielding device comprising a shielding material configured to be temporarily attached to an identity device and to shield an RFID tag within the identity device, and an attachment mechanism configured for attaching the shielding material to the identity device.

Various embodiments of the invention include a passport reading system comprising an RFID reader, and a base disposed to form a slot between the base and the RFID reader, a width of the slot configured for passage of a passport in an open position such that shielding material within the passport does not interfere with communications between the RFID reader and an RFID tag included in the passport.

Various embodiments of the invention include a passport reading system comprising a first RFID reader, a second RFID reader, a third RFID reader, the first, second and third RFID readers surrounding a passport reading volume and being disposed such that at least one of the first, second and third RFID readers will be at a proper angle relative to an antenna of an RFID tag within a passport in the passport reading volume to read the RFID tag, and also disposed such that transmission between the RFID tag and the at least one of the first, second and third RFID readers is not prevented by shielding within the passport when the passport is open in the passport reading zone regardless of the angle of the shielding relative to the first, second and third readers.

Various embodiments of the invention include a system comprising a cover material configured for inclusion in a polarity of identity devices, a strip of shielding deposited on the cover material, a first RFID tag deposited on the cover material, a second RFID tag deposited on the cover material, and a cutting area configured to be cut in order to produce the plurality of identity devices, the cut including cutting of the strip of shielding and separation of the first RFID tag and the second RFID tag.

Various embodiments of the invention include a passport comprising an RFID tag configured to transmit identifying information, a surface configured to visually display the identifying information, and a cover including a first part and a second part separated by a fold, the first part including the RFID tag and the second part including a radio frequency shielding configured to shield the RFID tag when the cover is closed, and configured to allow reading of the RFID tag when the cover is open, the radio frequency shielding including metallic fibers disposed within the second part.

Various embodiments of the invention include a passport comprising a first cover part including identifying information including a photograph on an inside surface, a second cover part separated from the first cover part by a fold, an RFID tag within the first cover or the second cover part, and a page between the first cover part and the second cover part, the page including shielding configured for shielding the RFID tag in a first position and not shielding the RFID tag in a second position.

Various embodiments of the invention include a passport comprising a first cover part including an RFID tag disposed at least 5 mm from a fold, a second cover part separated from

the first cover part by the fold and including shielding configured for shielding the RFID tag in a first position of the second cover part and not shielding the RFID tag in a second position of the cover part.

Various embodiments of the invention include a system comprising a cover material configured for inclusion in a polarity of identity devices, a strip of shielding deposited on the cover material, a first RFID tag deposited on the cover material, a second RFID tag deposited on the cover material, and a cutting area configured to be cut in order to produce the plurality of identity devices, the cut including cutting of the strip of shielding and separation of a location for depositing of the first RFID tag and a location for depositing of the second RFID tag.

Various embodiments of the invention include a method comprising depositing a radio frequency shielding material on a first part of a cover material, depositing at least a first radio frequency identity tag and a second radio frequency identity tag on a second part of the cover material, cutting the cover material through the radio frequency shielding, and creating a fold in the flexible material, the fold separating the first part of the cover material from the second part of the cover material.

BRIEF DESCRIPTION OF DRAWINGS

FIG. 1 illustrates a container including a receptacle configured to store an ID incorporating an RFID tag, according to various embodiments of the invention.

FIG. 2 illustrates a container including an RFID tag or alternatively an RFID tag reader.

FIG. 3 illustrates various monitoring systems that employ illustrative embodiments of the container of FIG. 2.

FIG. 4 illustrates further details of an embodiment of the container of FIG. 2 that includes a monitored vial.

FIG. 5 illustrates another embodiment of a monitored vial that includes more than one compartment.

FIG. 6 illustrates an embodiment of the container of FIG. 2 wherein the container is a room.

FIG. 7 illustrates an access system based on an RFID tag, according to various embodiments of the invention.

FIG. 8 illustrates a clamshell ID including a base including an RFID tag and a cover connected to the base, according to various embodiments of the invention.

FIG. 9 illustrates a clamshell ID similar to that shown in FIG. 8 except that the base and cover are pivotally connected at a point rather than along an edge, according to various embodiments of the invention.

FIGS. 10A and 10B illustrate an ID similar to that shown in FIGS. 8 and 9 except that the cover is configured to fit into the base, according to various embodiments of the invention.

FIG. 11 illustrates further detail of some embodiments of a clamshell ID having a first cover and second cover separated by a fold.

FIG. 12 illustrates further embodiments of a clamshell ID including a first cover and second cover separated by a fold.

FIG. 13 illustrates a clamshell ID wherein shielding is added to a page, according to various embodiments of the invention.

FIG. 14 illustrates an identification device, according to various embodiments of the invention.

FIG. 15 illustrates a method of allowing communication to an RFID tag, according to various embodiments of the invention.

FIG. 16 illustrates a method of modifying an RFID enabled identification device, according to various embodiments of the invention.

FIG. 17 illustrates a method of making an identity device including, according to various embodiments of the invention.

FIG. 18 is a block diagram illustrating a stage in the manufacture of an identification device, according to various embodiments of the invention.

FIG. 19 illustrates the method of manufacturing an identification device, according to various embodiments of the invention.

FIG. 20 illustrates an RFID reader system, according to various embodiments of the invention.

FIG. 21 illustrates an alternative RFID reader system, according to various embodiments of the invention.

DETAILED DESCRIPTION

Various embodiments of the present invention includes holders (e.g., containers) including radio frequency shielding materials to protect items, such as IDs (identification devices), incorporating RFID tags from being read. In some embodiments, a person can allow information within an RFID tag to be read by removing the item from the holder, while in other embodiments the holder is merely opened or removed to allow the RFID tag to be read. Replacing the item within the holder, or closing the holder, secures the item's RFID tag from unwanted readings from, or detection by, unknown or unauthorized RFID readers. It will be appreciated that items other than IDs, such as library books, consumer electronics, medications, and so forth, can also include, or be packaged with, RFID tags that a person may wish to shield from unauthorized RFID readers. Holders specifically tailored for such items, as well as general purpose holders such as wallets, purses and briefcases, can also include radio frequency shielding (also referred to herein as shielding) according to the present invention.

The holder can be in the general form of a container as an illustrative example, having two similar rectangular sides joined around three edges, being configured to be repeatedly opened and close, and optionally including a closure or flap along the fourth side. Such holders are well suited to the typical shape of most personal IDs such as passports, driver's licenses, green cards, credit and debit cards, medical information cards, insurance cards, medical alerts, student identification cards, security badges, immigration documents, or the like. Typically, the holder is configured to be repeatedly opened and closed to receive the ID.

The holder can also be a case such as a carrying-case for a cell phone or digital camera. The holder can also be a purse, suitcase, backpack, briefcase, satchel, glove compartment, a jewelry container, and the like. In some embodiments, the RF shielding is physically attached to the holder. The holder can alternatively include a checkbook holder, a wallet, a ticket holder, or a windshield visor pocket. Some embodiments of the invention are directed at articles of clothing in which one or more pockets include an attached radio frequency shielding material. Additional embodiments are directed to key holders.

The desirability of RFID shielding for the objects listed above will be readily appreciated. Being able to read an RFID tag on a green card (an immigration document) without the owner of the green card giving consent or being aware that the green card is being read, for example, can enable less scrupulous individuals to engage in improper behaviors. Incorporating RFID shielding into a wallet, purse, or other type of holder would prevent an RFID tag on an item within the holder from being read unless the item is deliberately exposed to the RFID reader, for instance, by removing the item from

the holder. In view of the problem of identity theft, such shielding is desirable for credit cards with RFID tags, social security cards with RFID tags, driver's licenses with RFID tags, and so forth.

In some instances the RFID tag is essentially a label that has been attached to an object for inventory or similar purposes. Library books can carry RFID tags, for example. Accordingly, providing RFID shielding for various carrying devices, such as purses, suitcases, book bags, briefcases, and satchels can prevent RFID tags in library books and other objects from being read without permission. In other instances the RFID tag is more integral with an object. Consumer electronics, electronic media, and so forth, can be manufactured to include RFID tags inside of housings, on printed circuit boards, and on electronic components, for example. Often, such devices have specially designed cases such as cell phone cases and camera cases. These cases can also comprise RFID shielding to prevent the RFID tags in the associated devices from being read without authorization.

In some embodiments, the holder is clear (e.g., transparent) so that the ID, such as a driver's license, can be readily seen without having to be removed from the holder. Many wallets include either a plastic sleeve or a leather pocket with a plastic window for this purpose. In some embodiments, of the invention in which at least part of the holder is transparent, the shielding in the transparent region needs to also be transparent. Certain electrically conductive polymers can serve as the RFID shielding material in these embodiments. Other transparent and non-transparent materials for RFID shielding are discussed further herein.

In some embodiments, the holder is designed to allow the ID to be easily and repeatedly removed and returned. For instance, some credit and debit cards have a smaller format (mini-cards) and can be stored in a matching case that can serve as a fob for keys. In some of these embodiments, the holder and the ID card are pivotally attached to one another so that the ID card can flip out from the holder, and in still further embodiments a spring mechanism aids in extending and retracting the ID card. Other cases of the present invention can comprise a clamshell configuration. Such ID card holders of the present invention include an RFID shielding material.

The present invention also provides for articles of clothing designed to include pockets that can shield RFID tags on objects within the pockets. In these embodiments the articles of clothing can be made from a cloth that includes a radio frequency shielding material, or the pocket can be lined with the radio frequency shielding material.

The present invention also provides for key holders comprising RFID shielding. The keys that are held by such key holders can be either mechanical or electronic, where mechanical is used herein to refer to keys meant to fit into mechanical locks such as car keys, house keys, and the like. Electronic keys refer to keys that carry an encoded password on a magnetic strip, a bar code, an RFID tag, or the like. Either type of key can include an RFID tag as either a further component of the locking mechanism or for completely unrelated reasons. An RFID tag on a key is part of the locking mechanism, for example, when the lock reads the RFID tag for some purpose, such as to read the key numbers from RFID tags on different keys in order to track which keys are being used in the lock.

Electronic keys are often placed on ID badges and other forms of identification. An RFID tag with such electronic keys may carry confidential information but be unrelated to the lock mechanism. In some embodiments, the key holder is

retractable, and in some of these embodiments the key holder is spring-loaded to automatically retract the key into the key holder.

In the embodiments described herein, the holder, whether an container, case, article of clothing, or key holder, has some form of opening through which the ID or other object having an RFID tag can be transferred. In some embodiments, the holder also includes a closure for closing the opening. In some of these embodiments, the closure can comprise a flap that closes over the opening. In other embodiments the closure is a zipper, Velcro, or related closure device. The closure can provide an electrical contact between opposing sides of the opening, in some instances.

In some embodiments, the RFID shielding material is incorporated into an ID. For example, a passport can include an RFID shielding material in the passport's cover so that an RFID tag within the passport can only be read when the passport is opened. Similarly, a driver's license can include a clamshell cover and base including an RFID shielding material, or a pivoting cover including an RFID shielding material.

The RFID shielding material can be provided in numerous different ways. The radio frequency shielding material can include a conductive material such as a metal or an electrically conductive plastic. The RFID shielding can be attached using adhesive. The radio frequency shielding material can include a mesh with a mesh size small enough to provide shielding against the radio frequency range used by RFID readers. The radio frequency shielding material can be laminated, either by laminating the RFID shielding material to another layer, such as a protective material layer, and/or by laminating together multiple layers of RFID shielding materials. In many embodiments the RFID shielding material is either flexible, transparent, or both. Examples of suitable RFID shielding materials include metal-coated elastomers such as aluminized Mylar and copper-coated plastic sheets and films. In some embodiments, the RFID shielding material is a semi-transparent mesh.

In some embodiments, the RFID shielding material is effective to form a Faraday cage around the ID, object, or key. Closing the closure can be effective to complete the Faraday cage, in some instances. In other embodiments the RFID shielding is used in selective locations in the holder. For example, where a nation's passport includes an RFID tag in a lower right-hand corner of the cover, passport holders designed for that nation's passports need only include RFID shielding above and/or below the location of the RFID tag when the passport is in the passport holder.

The RFID shielding shields an RFID tag from a reader in two ways. First, the RFID shielding greatly reduces the power being broadcast from the reader that reaches the RFID tag within the holder. This cuts the power available to the RFID tag to transmit information back. Secondly, even if the RFID tag receives enough power to transmit, the signal sent from the RFID tag is also attenuated. Accordingly, it will be appreciated that the effectiveness of the RFID shielding can be varied considerably based on choices of radio frequency shielding materials and their thicknesses, mesh sizes, and so forth. In some embodiments, the radio frequency shielding material provides a reduction of input power to the RFID tag by between about 5 db-30 db, 10 db-25 db, 15 db-20 db, or more than 15, 25, 35 or 45 db.

In some embodiments, the container is configured to be repeatedly opened and closed to receive an item including an RFID tag. In some embodiments, the container includes a closure configured to enhance the shielding.

In some embodiments, the container configured to just fit a standard California driver's license. These embodiments may

be characterized by inner dimensions of less than 3.5 inches, 3.75 inches, 4 inches or 4.5 inches height, and less than 2.25 inches, 2.5 inches or 2.75 inches in width. In some embodiments, the container is configured to just fit a U.S. passport or a passport issued by another country. These embodiments may be characterized by inner dimensions of less than 5 inches, 5.25 inches, 5.5 inches or 6 inches in height, and less than 3.5 inches, 3.75 inches, 4 inches or 4.5 inches in width.

FIG. 1 illustrates a Container **100** including a Receptacle **110** configured to store an ID **130** (identification device) incorporating an RFID Tag **140**. The Container **100** and Receptacle **110** may include a wallet, purse, passport holder, key chain, ticket holder, pocket, sleeve, slot, opening, niche, compartment, lid & base, glove compartment, jewelry, suitcase, backpack, bag, carrier, carton, box, sack, carton, casing, shell, carapace, covering, sheath, or the like. Container **100** further includes attached Shielding **120** configured to attenuate the transmission of radio frequency signals to or from the RFID Tag **140**. Receptacle **110** is configured to be repeatedly opened and repeatedly closed for insertion and removal of ID **130**.

FIG. 2 illustrates an embodiment of a Container **200** including RFID Tag **140** or alternatively an RFID tag Reader **210**. Container **200** is optionally an embodiment of the Container of FIG. 1, and visa-versa. Container **200** further includes Shielding **120** configured to attenuate the transmission of radio frequency signals to or from the RFID Tag **140** or Reader **210**. The shielding effect of the Shielding **120** is optionally dependent on a state of the Container **200**. For example, in some embodiments, the Shielding **120** may be more efficient at attenuating RF transmission when Container **120** is closed than when it is open. As such, in some embodiments, the state of the Container **200** may be determined by a magnitude of a detected radio frequency signal between RFID Tag **140** and Reader **210** either of which may be within Container **200**.

FIG. 3 illustrates various monitoring systems that employ illustrative embodiments of Container **200**. These illustrative embodiments include a wall hanging (e.g., a Picture **320**), a Refrigerator **325**, a Jewelry Box **330**, a Chest of Drawers **335**, a Monitored Vial **340**, a Filing Cabinet **345**, and a Safe **350**. In these embodiments, the monitoring systems further include RFID tag Reader **210** and optional Alarm and/or Log **310**. Each of these examples of Container **200** include one or more RFID Tag **140** and Shielding **120** (whether shown or not) configured to modify the transmission of RFID signals from Reader **210** to RFID Tags **140** responsive to a state of the Container **200**.

For example, the Picture **320** illustrated includes Shielding **120** (not shown) that surrounds the RFID Tag **140** while Picture **320** is mounted on Wall **330**. Shielding **120** is configured such that the attenuation effect of the shielding will be reduced if Picture **320** is removed from Wall **330**. For example, Shielding **120** may be disposed to form a Faraday cage around or interfere with the RFID Tag **140** (e.g. be on the back of the picture, optional standoffs, and/or wall) and if Picture **320** is removed from Wall **330** a resulting gap, or reduction in interference, will allow increased RFID signal transmission between the associated RFID Tag **140** and Reader **210**. Picture **320** may alternatively be a statue or some other object designed to sit on a surface with an RFID tag between the object and the surface.

In a similar manner each of the Refrigerator **325**, Jewelry Box **330**, Chest **335**, Monitored Vial **340**, Filing Cabinet **345** and Safe **350** includes Shielding **120** configured such that a magnitude of an RFID tag signal received by Reader **210** is dependent on whether the particular container is open or not.

Reader **210** is configured to detect RFID signals from one or more of the RFID Tags **140** and to generate a responsive output signal. In some embodiments, this responsive output signal is a quantitative or qualitative indication of the state of one or more of the containers. The reader is optionally configured to distinguish the signals received from each of the one or more RFID tags and, thus, identify which of the containers is open.

Alarm/Log unit **310** is optionally an alarm system or a logging system configured to activate an alarm or log an event responsive to the output signal of Reader **210**. For example, in some embodiments, the Alarm/Log unit **310** is configured to activate an alarm when Picture **320** is removed from the wall or Safe **350** is opened. In some embodiments, the Alarm Log unit **310** is configured to log when Filing Cabinet **345**, Chest **335** or Drawers or Refrigerator **325** is opened.

In alternative embodiments, Reader **210** may be placed within the container and RFID Tag **140** outside.

FIG. **4** illustrates further details of an embodiment of the Container of FIG. **2** that includes Monitored Vial **340**. Monitored Vial **340** includes shielding in a Lid **410** and/or Base **420**. When the Lid **410** and Base **420** are attached the shielding attenuates any signal from the enclosed RFID Tag **140**. When Lid **410** is opened the attenuation is reduced. The RFID tag is optionally disposed on the underside of Lid **410**. The illustrated embodiments are optionally used to monitor the use of medication or other material stored within Monitored Vial **340**. The monitored vial is optionally an alternative form of Container **200** and optionally configured to store alternative types of goods. In some embodiments, Reader **210** of FIG. **3** is configured to log when Monitored Vial **340** is opened and closed. For example, if a user has a medication that should be taken at a specific time Reader **210** may be used to detect if Monitored Vial **340** is opened at these times and activate a reminder using Alarm/Log **310** if Monitored Vial **340** is not opened at a time medication should be taken.

FIG. **5** illustrates another embodiment of Monitored Vial **340** that includes more than one Compartment **510**. Each Compartment **510** includes a separate RFID Tag **140** that may be separately identifiable using Reader **210**. This embodiment may be used, for example, to monitor an activity that should occur at a variety of different times (e.g., times of day or days of the week.).

FIG. **6** illustrates an embodiment of the Container of FIG. **2** wherein Container **200** includes a Room **610**. In these embodiments, radio frequency signals between RFID Tag **140** and Reader **210** may be used to determine if an opening to the room is open. Room **610** includes Shielded Wall(s) **620** that block radio frequency signals between Tag **140** and Reader **210** when an Opening **630** is closed. When Opening **630** is open Tag **140** can be detected by Reader **210** and this stage can be logged by Alarm/Log **310**. While the illustration shows Reader **210** within Room **610** and RFID Tag **140** outside, these positions are optionally exchanged. Room **610** is optionally a shipping container. RFID Tag **140** is optionally mounted on Opening **630** such that Tag **140** is brought within reading range of Reader **210** when Opening **630** is opened. Opening **630** can be, for example, a window or door.

FIG. **7** illustrates an access system based on an RFID Tag **140**. RFID Tag **140** is optionally implanted within a Animal or Person **720** or attached to an animal collar. A Reader/Lock Control **710** is configured to detect a signal from RFID Tag **140** and to control a Lock **740** in response. Lock **740** controls the function of a Barrier **730**, such as a door or gate. Reader/Lock Control **710** is optionally programmable to operate responsive to particular instances of RFID Tag **140**.

The Reader/Lock Control **710** illustrated in FIG. **7** is optionally used in the following manner. RFID Tag **140** is placed within or attached to the Animal or Person **720**. Reader/Lock Control **710** is placed in a programming mode. A serial number of the RFID Tag **140** is programmed into the Reader/Lock Control **710** either by digital data entry or communication, or by bringing the RFID Tag **140** within the reading range of the Reader/Lock Control **710**, such that the serial number can be read from the RFID Tag **140**. The Reader/Lock Control **710** is placed in a normal operation mode wherein it monitor's for the presence of the RFID Tag **140**. The RFID Tag **140** is detected by the Reader/Lock Control **710**. The serial number is read from the detected RFID Tag **140** by Reader/Lock Control **710**. Reader/Lock Control **710** compares the read serial number with the serial number programmed into the Reader/Lock Control **710** while in the programming mode. If the read and programmed serial numbers agree Lock **740** is activated in response. Activation of Lock **730** controls (e.g., locks or unlocks) access through Barrier **730**. After the detected RFID tag is no longer detected by the Reader/Lock Control **710**, Reader/Lock Control **710** optionally reactivates Lock **740** to return it to a previous state.

FIG. **8** illustrates a Clamshell ID **810** (e.g., greencard (immigration card), passport, driver's license, transaction card, key card, national identity card, or the like). Transaction cards include credit cards, debit cards, check cards, payment cards, fare (e.g., transit) cards, or the like. Clamshell ID **810** includes an optional picture, a Base **830** including an RFID Tag **140**, and a Cover **820** connected to Base **830** in a clamshell configuration, e.g., connected along an edge or Fold **840**. Cover **820** and/or Base **830** include RFID shielding configured to attenuate radio frequency signals to or from RFID Tag **140** when Cover **820** is closed (e.g., shut), and to not attenuate, or attenuate to a lesser extent, radio frequency signals to or from RFID Tag **140** when Cover **820** is open. The shielding is optionally laminated into Base **830** and/or Cover **820**. In some embodiments, Clamshell ID **810** includes shielding in both Base **830** and Cover **820**. Base **820** can be the cover of a passport or other document. In some embodiments, Base **830** includes a plastic card.

In various embodiments, Clamshell ID **810** includes a passport, driver's license, credit card, etc. that includes RF shielding in one part (e.g., a page or cover) and an RFID tag in another part (e.g., a different page or cover). Not shown in FIG. **8** are pages that may be included between the covers (e.g., Base **830** and Cover **820**). The RF shielding and RFID Tag **140** are configured such that, when Clamshell ID **810** is closed the shielding interferes with the RF pickup of the RFID tag to an extent sufficient for reading of RFID Tag **140** to be attenuated.

In some embodiments, Clamshell ID **810** can be closed in two ways. First, such that a picture and/or other identification information is displayed on the exposed surface of Base **830**. Or, second, such that the picture and/or other identification information are covered by Cover **820**. These two methods of closure are achieved by rotating Cover **820** and Base **830** relative to each other in different directions around Fold **840**. In the first instance, the picture and/or other identification information can be used for identification while RFID Tag **140** is still shielded. Thus, Clamshell ID **810** can be used for identification (non-RFID) without unshielding RFID Tag **140**.

When the Clamshell ID **810** is open, the shielding is less close to RFID Tag **140** and, thus, the interference of the shielding is reduced and RFID Tag **140** can be read. The shielding does not necessarily form a Faraday cage around RFID Tag **140** when Clamshell ID **810** is closed. In some

11

embodiments, shielding is not included in the part of Clamshell ID **810** that includes the RFID Tag **140**. Clamshell ID **810** is optionally formed by laminating RFID Tag **140** and RF shielding between layers of Cover **820** or to a page disposed between Cover **820** and Base **830**. Further visible information such as a name and/or photograph can be placed on any surface of the Clamshell ID. Thus, in some embodiments, this visible information is visible when the Clamshell ID is open or closed. In other embodiments, this visible information is visible only when the Clamshell ID is open.

FIG. **9** illustrates an ID **910** similar to that shown in FIG. **8** except that Base **830** and Cover **820** are pivotally connected at a Pivot Point **920** rather than in a clamshell configuration. Cover **820** is configured to rotate over Base **830** as shown. When Cover **820** covers the Base **830** the RFID Tag **140** is shielded. When Cover **820** is rotated away from Base **830** RFID Tag **140** is unshielded. In some embodiments, Cover **820** may have two sections between which Base **830** fits. Either Cover **820** and/or Base **830** can include the RF shielding.

FIGS. **10A** and **10B** illustrate an ID similar to that shown in FIGS. **8** and **9** except that Cover **820** is configured to fit into Base **839**, or visa versa. In the example shown, Cover **820** slides into and out of a slot in Base **830** and thus shields and exposes, respectively, RFID Tag **140**. This embodiment may include an item to be worn such as a medical alert bracelet, an identity tag, a ring, clothing, glasses, or the like. For example, in the case of a medical alert bracelet, the bracelet includes an RFID tag (having medical information) that is only readable when a cover element of the bracelet is opened to expose the RFID tag to an RFID tag reader. When the cover is opened medical personal can read data from the RFID tag. When the cover is closed the medical information is shielded from being read by unauthorized persons and is thus kept confidential.

One embodiment of the invention includes the credit card (16) and case having sides (12) and (14) as illustrated in U.S. patent application 2004/0117514. In this embodiment, credit card (16) further (additionally) includes an RFID Tag **140** and sides (12) and/or (14) further include RF shielding, or visa versa. The credit card may be replaced by an alternative type of ID device, e.g., a driver's license, debit card, or others discussed herein.

On embodiment of the invention includes the credit card (3) and holder (1) as illustrated in U.S. patent application 2005/0011776. In this embodiment, credit card (3) further includes an RFID Tag **140** and the holder (1) further includes RF shielding. The credit card may be replaced by an alternative type of ID device, e.g., a driver's license, debit card, or the like.

One embodiment of the invention includes the carrying case taught in U.S. patent application 2004/0256469, wherein the carrying case further includes RF shielding.

One embodiment of the invention includes the credit card and pivoting case described in U.S. patent application 2004/0237360, wherein an RFID tag is included in one part (e.g., the credit card) and shielding in another part (e.g., the case). Thus, when the credit card is pivoted into the case the RFID tag is shielded. One embodiment of the invention includes a credit card and case illustrated in FIG. 10 of U.S. patent application 2004/0237360. In this embodiment, the credit card includes an RFID Tag **140** and the case includes shielding. The credit card may be replaced by an alternative type of ID device, e.g., a driver's license, debit card, or the like.

One embodiment of the invention includes the security wallet illustrated in U.S. Pat. No. 4,744,497, wherein the security wallet further includes RFID shielding.

12

Various embodiments of the invention include the foldable transaction cards illustrated in US. Patent Applications 2004/0169087 and 2004/0089724, wherein shielding is further included in one side of the fold while RFID Tag **140** is further included in the other side. RFID Tag **140** is shielded when the transaction card is folded closed and unshielded when it is open.

Various embodiments of the invention include the several different folding cards illustrated in U.S. Pat. No. 5,700,037 and Application 2005/0205665. Wherein these cards further include RFID Tag **140** in one part and shielding in another part, such that in one fold position RFID Tag **140** is shielded by the shielding, and in another fold position RFID Tag **140** is un-shielded.

One embodiment of the invention includes the credit card case illustrated in U.S. patent application 2002/0117243. Where in the credit card case further includes shielding configured to shield an rfid enabled credit card or other identification device.

FIG. **11** illustrates further detail of some embodiments of Clamshell ID **810**, having a First Cover **1110** and a Second Cover **1120** separated by Fold **840**. First Cover **1110** and a Second Cover **1120** may be, for example, Base **830** and Cover **820**. Fold **840** can be a spine, hinge, crease, or the like. In alternative embodiments, First Cover **1110** and/or Second Cover **1120** can be embodied as a page or pages between covers of an identity document. Shielding **1130** is disposed as part of the second cover (e.g., or on or in an ID document cover or page). Shielding **1130** is optionally disposed away from fold **840** such that, when Clamshell ID **810** is open, the shielding as well separated from RFID Tag **140**. In various embodiments, the separation between shielding **1130** and Fold **840** is greater than 5 mm, 10 mm, 15 mm, 20 mm, 25 mm or 30 mm. Likewise, RFID Tag **140** is optionally disposed away from Fold **830**. In various embodiments, the separation between RFID Tag **140** (including antenna) and Fold **840** is greater than 5 mm, 10 mm, 15 mm, 20 mm, 25 mm or 30 mm. Alternatively, RFID Tag **140** and/or Shielding **1130** may be disposed to abut Fold **840**.

FIG. **12** illustrates embodiments of Clamshell ID **810** including a First Cover **1210** and a Second Cover **1220** separated by Fold **830**. These embodiments further include a Page **1230** disposed between First Cover **1210** and Second Cover **1220**. Page **1230** includes RFID Tag **140** or Shielding **1130**. For example, these embodiments of Clamshell ID **810** can include a passport including a photograph and identity information within an inside surface (facing toward Page **1230**) of First Cover **1210**, RFID Tag **140** within First Cover **1210** or Second Cover **1220**, and Shielding **1130** within Page **1230**. RFID Tag **140** can be shielded and un-shielded by moving Page **1230** close to or away from RFID Tag **140**. In embodiments, wherein RFID Tag **140** is included in Second Cover **1220**, RFID Tag **140** is shielded when Page **1230** is held close to Second Cover **1220**. In this position it may be possible to view the photograph and identity information within the inside surface of First Cover **1210** without un-shielding RFID Tag **140**. When Page **1230** is moved away from Second Cover **1220** then RFID Tag **140** is unshielded.

By including the RF Shielding **1130** with one of the one or more Page **1230**, Clamshell ID **810** can be opened without necessarily removing Shielding **1130** from the vicinity of RFID Tag **140**. For example, if RFID Tag **140** is disposed within the back cover, and Clamshell ID **810** is opened such that the inside of the First Cover **1210** is visible, Page **1230** including Shielding **1130** could remain adjacent to Second Cover **1220** and thus limit communication with the RFID Tag **140**. To allow communication with RFID Tag **140** Page **1230**

including Shielding 1130 is turned such that it moves away from Second Cover 1220. The Shielding 1130 may be attached to Page 1230 or be included within Page 1230. For example, Shielding 1130 may be laminated within Page 1230, be sewn on Page 1230, be glued on Page 1230, be within the material of Page 1230, or otherwise be connected to Page 1230. In various embodiments, Shielding 1130 includes a wire mesh, metallic fibers, metallic particles, metallic thread, or the like. Shielding is optionally attached to a binding of Clamshell ID 810 as Page 1230. Page 1230 is optionally bound to Clamshell ID by stable, pin, wire, thread, adhesive, laminate, or the like.

FIG. 13 illustrates embodiments of Clamshell ID 810 wherein Shielding 1130 is added to Page 1230 following assembly of Clamshell ID. In these embodiments, Shielding 1130 is included in a Shielding Insert 1310. Shielding Insert 1310 optionally includes Adhesive 1320 or some other mechanism for attaching Shielding Insert 1310 to Page 1230. The attachment of Shielding Insert 1310 to Page 1230 can be permanent or temporary (e.g., Shielding Insert 1310 may be removable). In various embodiments, Shielding Insert 1310 includes a metal plate, wire mesh, metallic fibers, metallic particles, metallic thread, or other forms of shielding.

The size of Shielding Insert 1310 is optionally the same as or slightly smaller than a European Union Passport, a Japanese Passport, a Chinese Passport, a United States Passport, or the like. Alternatively, in various embodiments, Shielding Insert 1310 is configured in size such that it can be attached to Clamshell ID 810 at least greater than 5 mm, 10 mm, 15 mm, 20 mm, 25 mm or 30 mm from Fold 830. For example, Shielding Insert 1310 may be configured to attach to Page 1230 such that Shielding Insert 1310 extends from near an outer edge (opposite Fold 830) of Page 1230 to within 10 mm of Fold 830.

FIG. 14 illustrates embodiments of an Identification Device 1410, such as Clamshell ID 810. In these embodiments, Shielding Insert 1310 includes one or more clips 1420, clamp, pin, slot, rivet, or other mechanism configured for, optionally temporary, attaching Shielding Insert 1310 to Identification Device 1410. In some embodiments Clip 1420 is replaced by a slot configured to receive that part of Identification Device 1410 including an RFID tag. Shielding Insert 1320 is optionally pivotally connected to Identification Device 1210. In the embodiments illustrated by FIG. 14, Fold 830, Second Cover 1220 and Page 1230 are optional. For example, Identification Device 1410 can be a single piece driver's license, credit card, etc. (without separate front and back covers) including RFID Tag 140. Shielding Insert 1310 is configured to be attached to First Cover 1210, Page 1230, and/or Second Cover 1220. In these embodiments Page 1230 need not include shielding. In some embodiments, Shielding Insert 1310 may be attached to that part of Identification Device 1410 that includes RFID Tag 140. In these embodiments, Shielding Insert 1310 is inserted to shield RFID Tag 140 and removed in order to un-shield RFID Tag 140. In some embodiments, Shielding Insert 1310 includes a flat metal plate configured to fit within a passport, e.g., a passport issued by the United States, a European Country, or an Asian Country. In these embodiments, the size of shielding insert may be similar to or slightly smaller than the dimensions of the passport. In some embodiments, Shielding Insert 1310 can include an attachment device, such as Clip 1420, on more than one side (face). As such, Shielding Insert 1310 may be configured to shield and RFID enabled driver's license on one side and an RFID enabled credit card on the other side. Shielding Insert 1310 is optionally approximately the size of a driver's license or credit card. In some embodiments,

Shielding Insert 1310 has height and width dimensions similar to or smaller than a page between the front cover and the back cover. Shielding Insert 1310 is optionally thin and optionally flexible.

As illustrated in FIG. 15, some embodiments of the invention include a method of allowing communication to an RFID tag. The method includes a Step 1510 of opening a front cover of an identification device, such as Clamshell ID 810 or Identification Device 1410, in order to make information included on the inside of the front cover visible, an RF shielding page being kept in proximity of the back cover such that an RF tag within the back cover is unreadable. The RF shielding page can be for example an instance of Page 1230 or a page with Shielding Insert 1310 attached. The method further includes a Step 1520 of visually presenting the information on the inside of the front cover. The information can include a name, citizenship, photograph, identification number, or the like. A step 1530 includes turning the shielding page away from the back cover such that the RFID tag becomes unshielded and can communicate with a reader. The shielding page is a page, between the front cover and the back cover, that includes or is attached to RF shielding configured to limit communication with the RFID tag. In alternative embodiments of this method, the rolls of the front cover and back cover are reversed.

As illustrated in FIG. 16, some embodiments of the invention include a method of modifying an RFID enabled identification device, e.g., Identification Device 1410. This method includes, a Step 1610 of opening the identification device by turning a back cover away from a front cover; a Step 1620 of selecting a page disposed (optionally bound) between the front cover and the back cover; an optional Step 1630 of exposing an adhesive surface on an RF shielding insert, the RF shielding configured to limit RF communication between an RFID tag included in the identification device and a reader; and a Step 1640 of attaching the RF shielding insert to the selected page using the exposed adhesive. In alternative embodiments, the adhesive is optionally replaced by a clip, clamp, pin, slot, or other mechanism configured for temporary attachment to the identification device. The identification device is optionally a passport, driver's license, immigration document, national identity document, or other identification device discussed herein. The RF shielding insert is optionally sized (as discussed elsewhere herein) such that it is disposed at a distance from a fold in the identification device.

As illustrated by FIG. 17, one embodiment of the invention includes a method of making an identity device including: a Step 1710 of adding an RFID tag to a first cover layer; a Step 1720 of adding a second cover layer such that the RFID tag is disposed between the first cover layer and the second cover layer; and a Step 1730 of attaching an RF shield to the combined first cover layer and second cover layer. The RF shield is optionally attached as a page configured to be disposed between to parts of the combined first cover layer and second cover layer when the combination is folded. The RF shield is optionally temporarily attached to the combined first cover layer and second cover layer.

FIG. 18 is a block diagram illustrating the manufacture of an identification device, such as a passport. At one stage in the manufacturing process Shielding 1130 is dispensed in the form of a strip. The strip is laid down over what will be several separate identification devices when the manufacturing is completed. A plurality of RFID Tags 140 are deposited. The assembled material, including shielding is cut along a Cutting Line 1820 (cutting area) to separate the locations where the RFID Tags 140 are deposited or to be deposited. As a result a plurality of identity documents are produced. The cut along

15

Cutting Line **1820** occurs after Shielding **1130** is laid down. Pages are optionally added to the assembled material prior to cutting.

FIG. **19** illustrates the method of illustrating an identification device as shown in FIG. **18**. In an Add Shielding Step **1910**, shielding is added to an area of a cover that will become a first identification device and a second identification device. In an Add RFIDs Step **1920**, a first RFID tag is added to that part of the cover that will become the first identification device and a second RFID tag is added to that part of the cover that will become the second identification device. In a Cut Step **1930**, the cover is cut to separate that part that will become the first identification device and that part that will become the second identification device. Cut Step **1930** includes cutting the shielding added in Add Shielding Step **1910**.

FIG. **20** illustrates an RFID reader system configured to read Clamshell ID **810** e.g., an RFID enabled passport including shielding. Spacing between an RFID Reader **2010** and a Base **2020** is configured to form a Passport Slot **2030**. RFID Reader **2010** is configured to read Clamshell ID **810**. The height of Passport Slot **2030** is configured such that Clamshell ID **810** is sufficiently open when passed through Passport Slot **2030** between the RFID Reader **2010** and Base **2020**. E.g., Passport Slot **2030** is configured such that, in order to pass through Passport Slot **2030** Clamshell ID **810** cannot be partially open such that shielding within Clamshell ID **810** could block the communication between RFID Reader **2010** and the RFID tag included in Clamshell ID **810**. The width of the passport slot is optionally configured to assure that the shielding is not disposed between the RFID reader and the RFID tag.

FIG. **21** illustrates an RFID reader system including more than one RFID readers (RFID Reader **2010A**, RFID Reader **1010B**, and optionally RFID Reader **1010C**). The more than one RFID readers are disposed such that any shielding within an ID is never within the line of sites between all of the one or more RFID readers and an RFID tag in a reading volume. And in addition, the more than one RFID readers are disposed such that the angle between an antenna of the RFID tag is at least one of the RFID readers is favorable for communicating between the RFID tag and RFID reader. Achieving both or these criteria may require three or more RFID readers. In alternative embodiments, this system may include fewer or more RFID readers than illustrated. The illustrated readers optionally surround a walk through reading volume.

Several embodiments are specifically illustrated and/or described herein. However, it will be appreciated that modi-

16

fications and variations are covered by the above teachings and within the scope of the appended claims without departing from the spirit and intended scope thereof. For example, an RFID key device may include more than one RFID tag and moving of shielding may be used to determine which RFID tag can communicate with readers. The RFID tags discussed herein may include active or passive contactless circuits configured to transmit identification information.

The embodiments discussed herein are illustrative of the present invention. As these embodiments of the present invention are described with reference to illustrations, various modifications or adaptations of the methods and or specific structures described may become apparent to those skilled in the art. All such modifications, adaptations, or variations that rely upon the teachings of the present invention, and through which these teachings have advanced the art, are considered to be within the spirit and scope of the present invention. Hence, these descriptions and drawings should not be considered in a limiting sense, as it is understood that the present invention is in no way limited to only the embodiments illustrated.

What is claimed is:

1. A passport comprising:
 - a RFID tag configured to transmit identifying information;
 - a surface configured to visually display the identifying information; and
 - a cover including a first part and a second part separated by a fold, the first part including the RFID tag and the second part including a radio frequency shielding configured to shield the RFID tag when the cover is closed, and configured to allow reading of the RFID tag when the cover is open, the radio frequency shielding including metallic fibers disposed within the second part.
2. The shielding device of claim 1, wherein the shielding is configured to be attached to the device using adhesive.
3. The passport of claim 1, wherein the metallic fibers are laminated between layers of the cover.
4. The passport of claim 1, wherein the first part does not include shielding.
5. The passport of claim 1, wherein the first part does include shielding.
6. The passport of claim 1, wherein the RFID tag is disposed at least 10 mm from the fold.
7. The passport of claim 1, wherein the radio frequency shielding is transparent.
8. The passport of claim 1, wherein the page is transparent.

* * * * *